



Griffco Valve Inc.
 6010 N. Bailey Ave., Ste 1B
 Amherst, NY 14226 USA
 Phone: +1-716-835-0891
 Fax: +1-716-835-0893
sales@griffcovalve.com
www.griffcovalve.com

NEW

UniBody BACK PRESSURE VALVE & PRESSURE RELIEF VALVE (2 PORT)

Features:

- Completely machined body
- No seals or glued connections
- Union style connections
- Available in PVC and CPVC
- Adjustable Pressure Settings
- Anti-Siphon Function
- Composite PTFE/EPDM Diaphragm
- NSF certified (PVC only)
- 2 Year Warranty
- Made in the USA!




Griffco's new unibody valve is the latest innovation to ensure leak-free connections and operation. This new design allows flexibility of changing connection types, ease of maintenance, and eliminates additional system components (extra unions); saving time and money. As with all of the Griffco designs, the chemical feed system is safeguarded by either applying a continuous back pressure to the chemical feed pump, while also acting as an anti-siphon valve or allowing for system pressure relief (2-port only) in case of an upset condition. This new construction ensures increased leak-free reliability in the rigorous service of municipal and industrial applications. Wetted materials include: **PVC and CPVC**. Available from 1/2", 3/4", and 1" or DN 15, DN20, and DN25 union socket connections.

Operation:

Griffco diaphragm back pressure valves apply positive discharge pressure to a metering pump system to prevent siphoning and eliminate varying dosage rates caused by fluctuating downstream pressure. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded, the diaphragm is forced up and chemical flows through the valve to the injection point.

Griffco diaphragm pressure relief valves operate when the pressure in the chemical system exceeds the preset pressure of the valve. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded the diaphragm is forced up and the chemical flows out the relief port, back to the chemical tank or to the suction side of the pump.


TYPICAL INSTALLATION

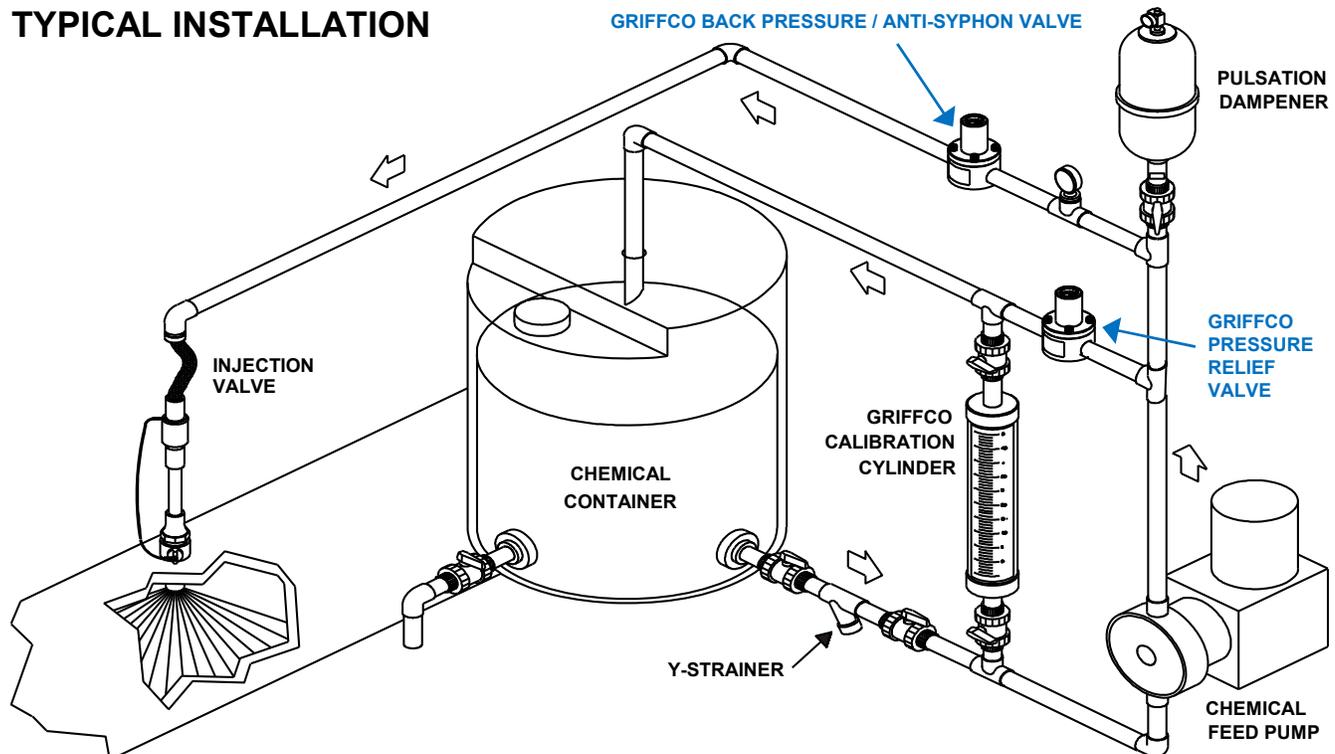


Technical Data:

| | | | | | |
|---------------------------------------------------------------------------|------------------------|--------------------------------------|-----------------------------------------------------------------------------|---------------------|-------------------|
| Types: BPU - Back Pressure Valve PRU2 - Pressure Relief Valve (2 Port) | | | Sizes: DN15, DN20, & DN25 or 1/2", 3/4", & 1" | | |
| Connections: | | | Union Socket | | |
| Pressure Adjustment: Bar (psi) | | | Standard: 1 - 10 bar, (10 - 150 psi) Optional: 0 - 3.5 bar, (0 - 50 psi) | | |
| Flow Rates @ 10 bar (150 psi) | | | Shipping Weight: kgs (lbs) | | |
| Size | Pulsating lph (gph) | Continuous m ³ h (gpm) | Plastic | Metal / Plastic Top | Metal / Metal Top |
| DN 15 (1/2") | 980 (260) | 3.4 (15) | 0.45 kgs (1 lb) | N/A | N/A |
| DN 20 (3/4") | 1135 (300) | 5.9 (26) | 1.4 kgs (3 lbs) | N/A | N/A |
| DN 25 (1") | 1890 (500) | 14.3 (63) | 1.4 kgs (3 lbs) | N/A | N/A |
| Max Temperature: | | | PVC: 60°C (140°F); CPVC: 90°C (195°F) | | |
| Max Operating Pressure @ 21°C (70°F): | | | Plastic/Noryl: 15.5 bar (225 psi) | | |
| Materials of Construction: | | | | | |
| Diaphragm | | | Standard: PTFE / EPDM Optional: Viton, Hypalon, Nitrile, PTFE / Viton | | |
| Orings | | | Standard: Viton, Optional EPDM | | |
| Valve Top | | | Standard: Noryl | | |
| Valve Body | | | PVC, CPVC | | |

Performance Curves:

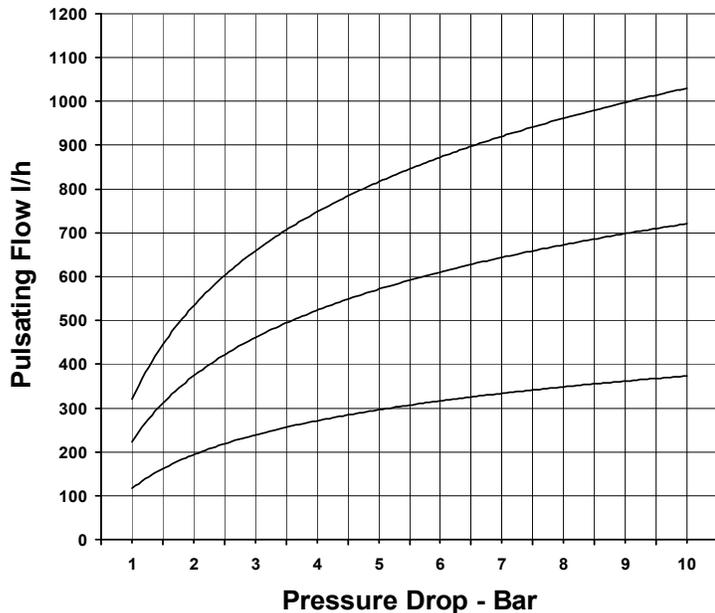

Dimensions:

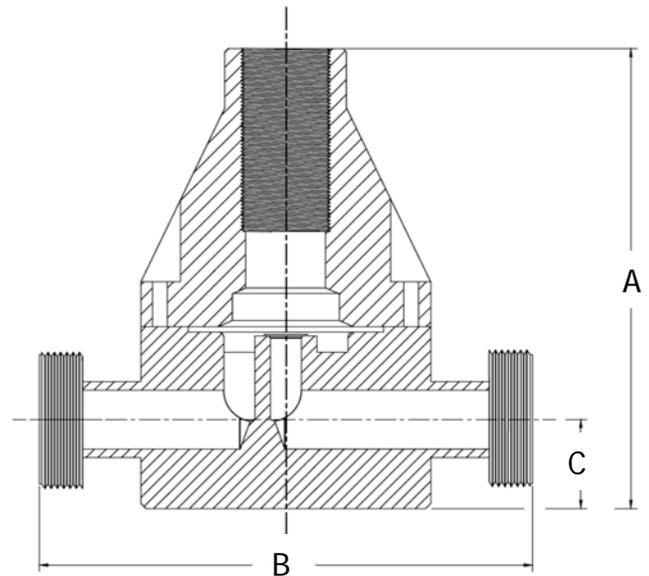

| Size | A cm (in) | B cm (in) | C cm (in) |
|------------|-------------|-------------|------------|
| 1/2", DN15 | 10.8 (4.25) | 12.3 (4.85) | 2.8 (1.08) |
| 3/4", DN20 | 14.1 (5.56) | 13.2 (5.21) | 3.2 (1.25) |
| 1", DN25 | 14.1 (5.56) | 13.2 (5.21) | 3.2 (1.25) |

Product Codes For Ordering:

BPU or PRU2

1 2 3 4

BPU – Back Pressure valve or PRU2 – Pressure Relief valve (2 port)

1 = Size
050 - 1/2", DN15
075 - 3/4", DN20
100 - 1", DN25

2 = Material
P - PVC
CP - CPVC

3 = Spring Pressure
Blank - 1 – 10 bar (10-150 psi)
1 - 0 – 3.5 bar (0-50 psi)

4 = Options
Blank – PTFE/EPDM Diaph. w/Viton Orings
V - Viton Diaphragm
E – EPDM Orings
SD – Metric socket (DN15, DN20, or DN 25)